


8.7 TPSM-PE heat-shrinkable, cross-linked collars with mastic.

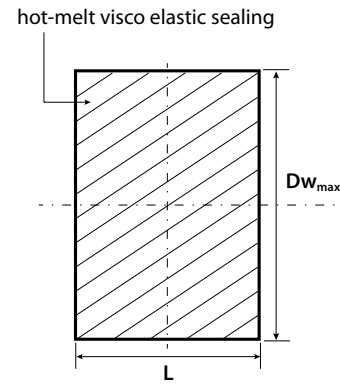

JACKET PIPE external diameter Dz: [mm]	COLLAR diameter prior and / after shrinking Dw _{max} / Dw _{min} : [mm]	COLLAR length L: [mm]	CATALOGUE No.
90	115 / 80	150	OTW1-090L150
		225	OTW1-090L225
110	130 / 90	150	OTW1-110L150
		225	OTW1-110L225
125	155 / 100	150	OTW1-125L150
		225	OTW1-125L225
140	170 / 110	150	OTW1-140L150
		225	OTW1-140L225
160	190 / 125	150	OTW1-160L150
		225	OTW1-160L225
180	210 / 135	150	OTW1-180L150
		225	OTW1-180L225
200	225 / 145	150	OTW1-200L150
		225	OTW1-200L225
225	260 / 165	150	OTW1-225L150
		225	OTW1-225L225
250	290 / 185	150	OTW1-250L150
		225	OTW1-250L225
280	330 / 210	150	OTW1-280L150
		225	OTW1-280L225
315	370 / 235	150	OTW1-315L150
		225	OTW1-315L225
355	395 / 250	150	OTW1-355L150
		225	OTW1-355L225
400	450 / 285	150	OTW1-400L150
		225	OTW1-400L225
450	505 / 315	225	OTW1-450L225
500	555 / 350	225	OTW1-500L225
520	555 / 350	225	
560	625 / 385	225	OTW1-560L225
630	775 / 480	225	OTW1-710L225
710	775 / 480	225	
800	865 / 525	225	OTW1-800L225
**	900	225	OTW1-900L225
**	1000	225	OTW1-1000L225

* Collars are also available in length L=450mm

** Collars diameters 900, 1000mm available on request

Heat-shrinkable cross-linked collars are equipped with hot-melt visco-elastic sealing. Easy and quick assembly, thanks to their pre-form as ready sleeve. Their surface is with a permanent change indicator (in form of the dimpled backing) disappearing in case of appropriate heating.